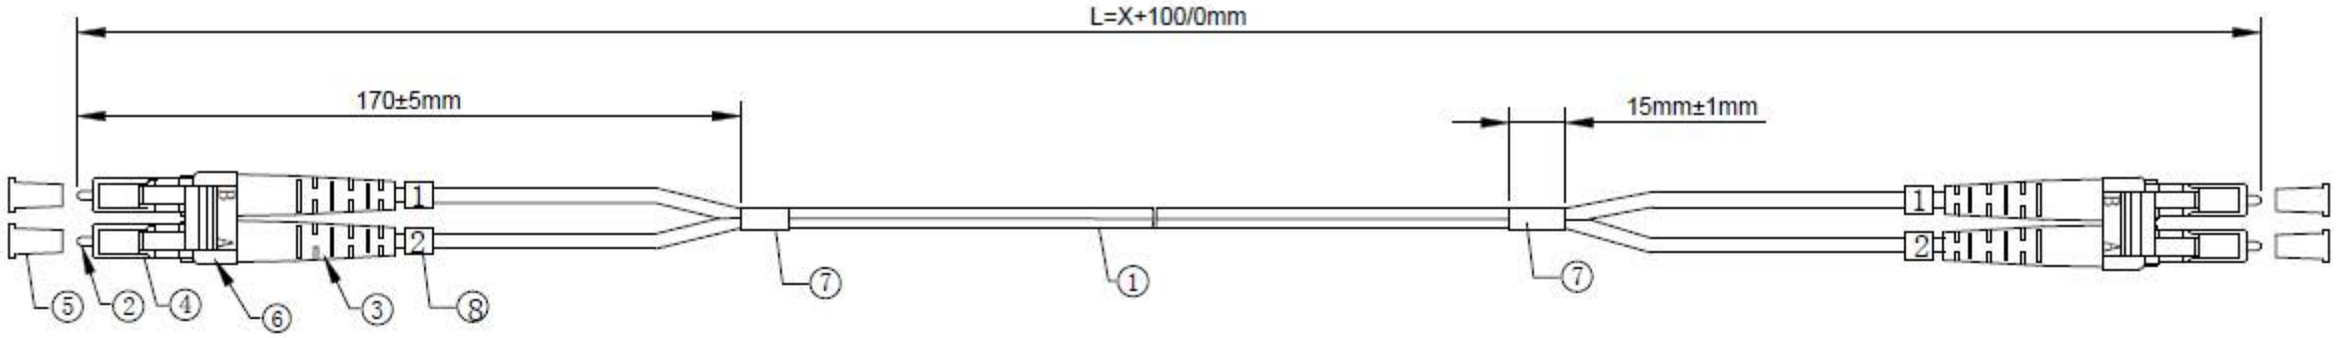



Note:
ROHS 2.0 & REACH Compliant
Test:
Grade Designation:Each to Reference

TYPE	MULTI-MODE
Insertion Loss	≦0.15dB (IEC 61300-3-4)
Return Loss	>25dB (IEC 61300-3-6)
Test Wavelength	850nm

Macro bending radius:7.5mm

NO.	SPECIFICATION STANDARD	QT'Y	REMARK
⑧	Ring 1 2 Yellow	4pcs	
⑦	Black Heat Shrink Tube	2pcs	
⑥	LC MM Aqua Clip	2pcs	
⑤	LC Dust Cap White	4pcs	
④	LC Aqua Duplex Connector	4pcs	
③	LC White Boot	4pcs	
②	LC Ferrule 126-128um	4pcs	
①	Fiber Optical Cable Duplex ϕ2.0mm OM3-300 50/125um Aqua LSZH	L+0.1m	

ITEM NO.	DESC.
21.99.8827	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 20m
21.99.8826	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 15m
21.99.8825	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 10m
21.99.8824	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 5m
21.99.8823	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 3m
21.99.8822	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 2m
21.99.8821	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 1m
21.99.8820	VALUE FO Jumper Cable, 50/125μm OM3, LC-LC, Low-Loss, 0.5m

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2019-8-26	A

SECOMP