



RoHS Compliant

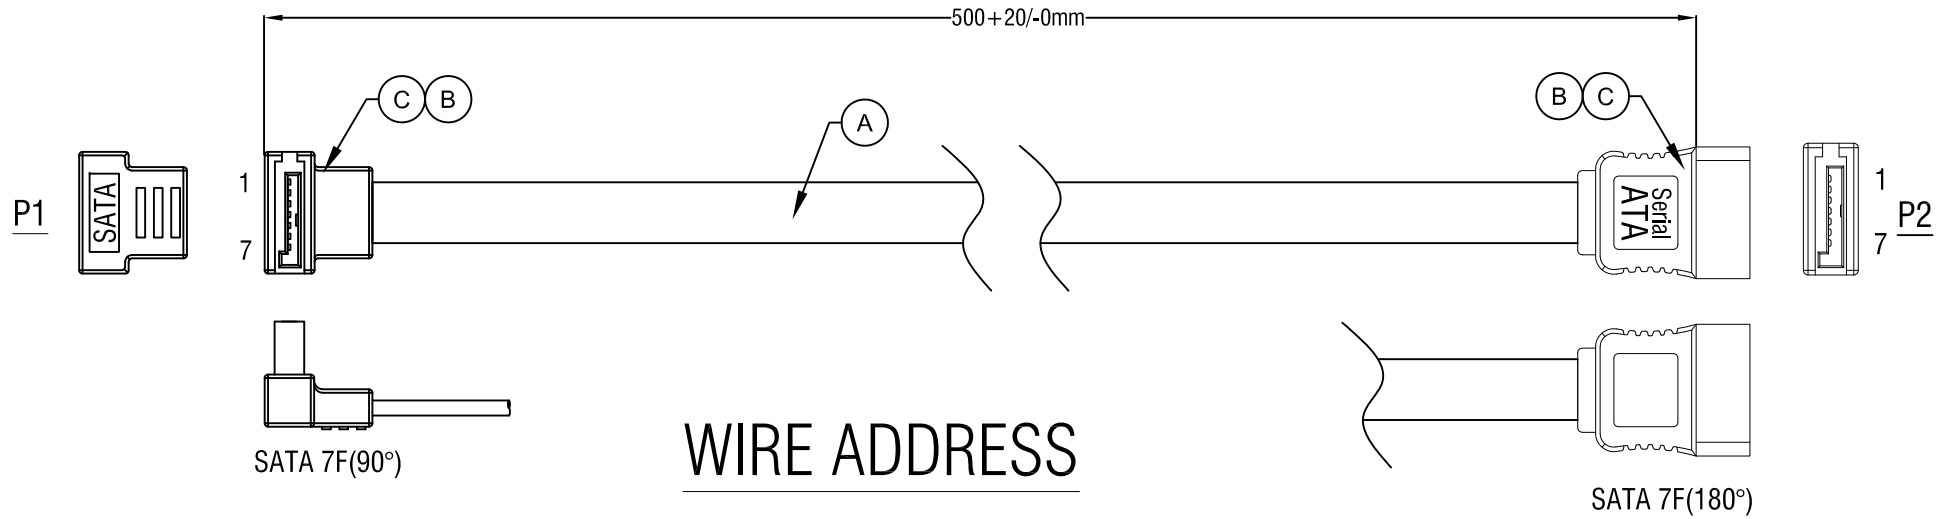

## WIRE ADDRESS

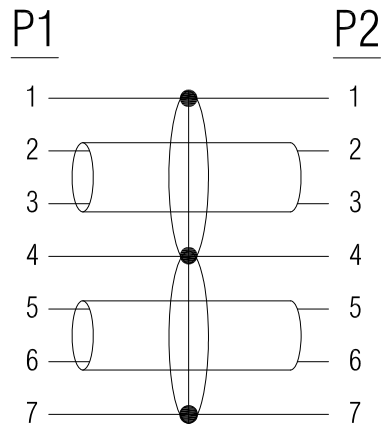

### Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

ROLINE Internal SATA 3.0 Gbit/s Cable, angled, 0.5 m

C	45P PVC BLACK		G
B	SATA 7P FEMALE(Black Insulator)	2	PCS
A	UL2725 26#(2C+AL)*2F+3D, OD=2.3*7.8mm FLAT RED PVC JACKET.(COPPER)	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

Item	11.03.1556	
Draw	Sam	Date: 2022.06.22
Approval		
Duty	F16	

**SECOMP**