



2000+30/-0mm

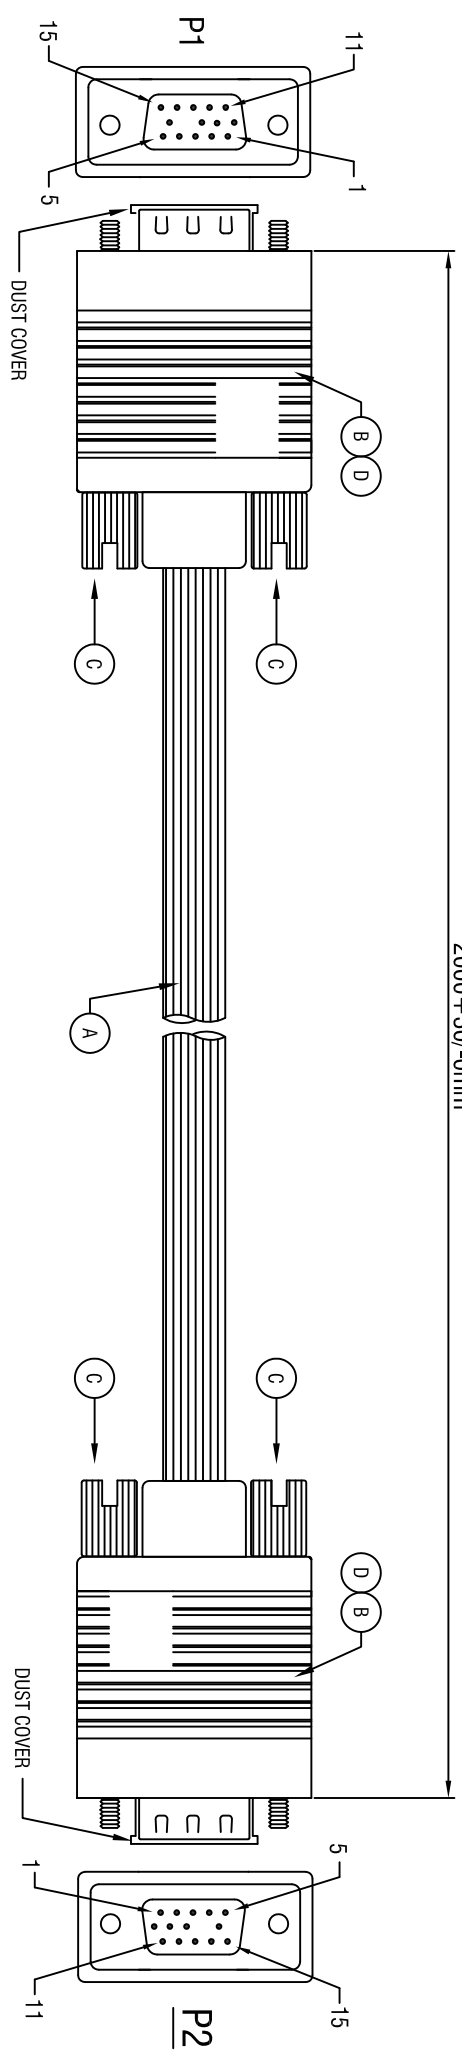

WIRE ADDRESS

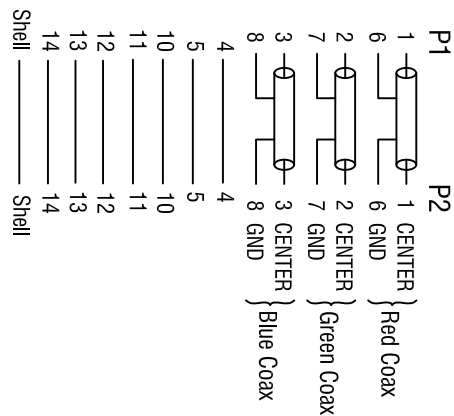

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

D	45P BLACK PVC		G	ROLINE HQ VGA Cable, HD15 M - HD15 M, 2.0m	
C	HD37.7 Screw	4	PCS	Item	11.04.5202
B	HDB15P MALE(PIN9 OUT,Black Insulator,Nickel Plated)	2	PCS	Draw	<i>Make</i> Date: 2020.05.13
A	UL2919,28# 3COAX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.	1	PCS	Approval	
PRODUCT SPECIFICATIONS			Quantity	Duty	F16
NUMBER			Unit	BOM.NO.:	13900
1			2	Sample NO.:	
4				Drawings of 1 (2) Proportion: 1:1 Unit(mm)	
					A4

