


20000+200/-0mm

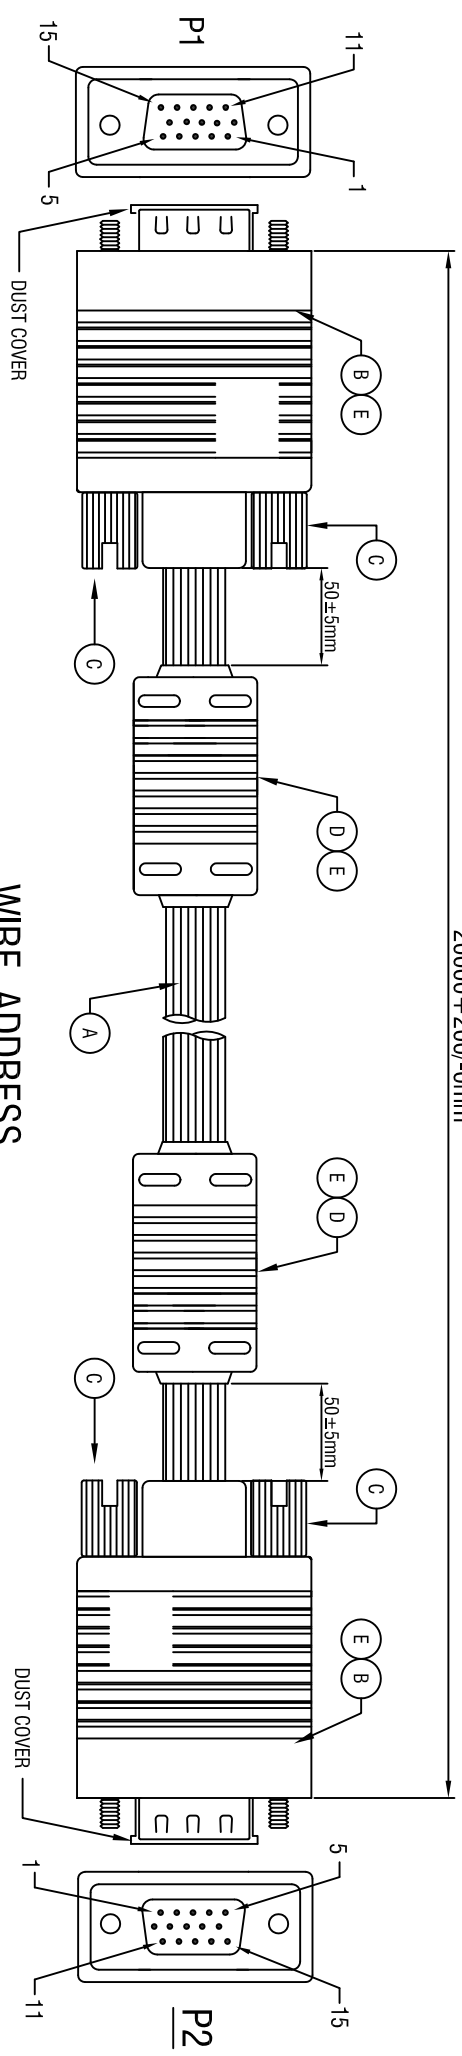

**WIRE ADDRESS**

P1	P2
1 — CENTER	1 — CENTER
6 — GND	6 — GND
2 — CENTER	2 — CENTER
7 — GND	7 — GND
3 — CENTER	3 — CENTER
8 — GND	8 — GND
4 —	4 —
5 —	5 —
9 —	9 —
10 —	10 —
11 —	11 —
12 —	12 —
13 —	13 —
14 —	14 —
15 —	15 —
64 —	64 —

Red Coax

Green Coax

Blue Coax

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
  - 2.CONTACT RESISTANCE:20Ω MAX.
  - 3.INSULATION RESISTANCE:5MΩ MIN.
  - 4.HI-POT:300V DC/10MS.
  - 5.Real Test Passed 1280\*1024.
  - 6.Real Test Not Twinkling, Double Vision and Decolor.

NUMBER	1	2	4	Quantity	Unit
E	45P BLACK PVC				G
D	Ferrite Core (17.5*28.5*9.5mm)			2	PCS
C	HD37.7 Screw			4	PCS
B	HDB15P MALE(Black Insulator Nickel Plated)			2	PCS
A	UL2919,28# 3G0AX+28#*9C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.			1	PCS
PRODUCT SPECIFICATIONS					
ROLINE High Quality Cable with Ferrite + DDC, HD15 M - HD15 M, 20m					
Item 11.04.5670					
Draw <i>Make</i> Date: 2020.05.13					
Approval					
Duty F16 BOM.NO.:13931					
Sample NO.					
Drawings of 1 (2) Proportion: 1:1 Unit(mm) A4					

