



Datenblatt - Fiche technique - Data sheet


11.99.5259



VALUE SVGA Kabel HD15 ST - ST, 20m

VALUE Câble SVGA HD15 M/HD15 M, 20m

VALUE SVGA Cable, HD15, M/M, 20 m

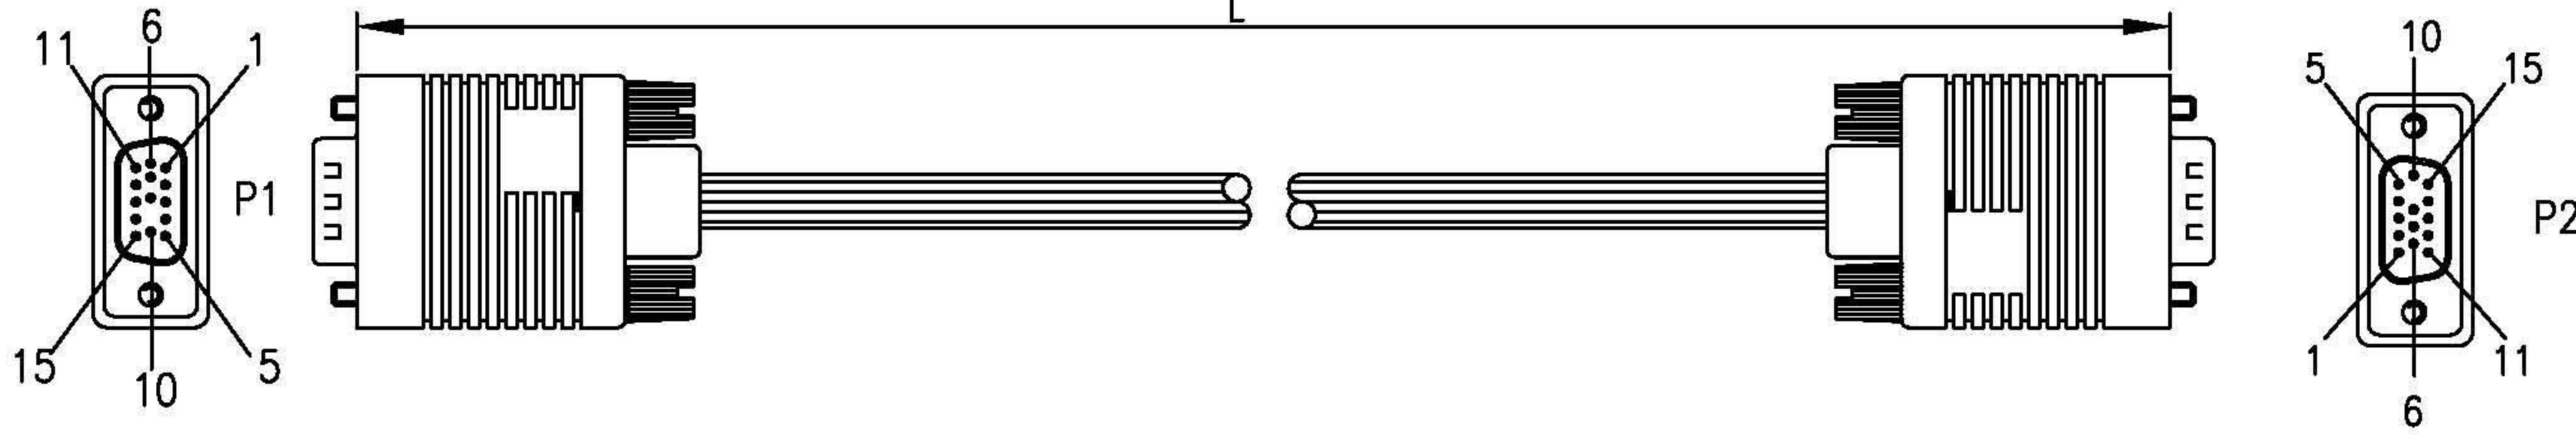


NOTES:

1.MATERIAL

- 1.1 CABLE(3+7):[(7/0.12TC+FPE1.5+30/0.10TC+PVC2.5)*3] + (7/0.12TC+PVC)*7)+AL+7/0.16BC+128/0.12ALM+BLACK PVC (KKE75-5001-87 PVC JACKET; OD:8.2±0.2MM . CABLE PRINTING: "LOW VOLTAGE COMPUTER CABLE 80°C 30V"
- 1.2 HDB15 TYPE MALE: SOLDER TYPE,EMPTY 9 PIN, GOLD PLATED CONTACTS AND NICKEL PLATED SHELL
- 1.3 SCREW:4*46MM,NICKED PLATED, #4-40UNC; BLACK(KKCS50-5001-95)PVC,
- 1.5 ALL HOODED:BLACK(KKCS50-5001-85)PVC.
- 2.TESTING: 100% SHORT AND OPEN TEST;
- 3.PACKING: 1PC/PE BAG+LABLE
- 4.ALL MATERIAL BE RoHS,REACH ENVIROMENTAL COMPLIANT.

P/N CHART

MODEL	LENGTH
11.99.5252	2000±50MM
11.99.5253	3000±70MM
11.99.5256	6000±75MM
11.99.5257	10000±150MM
11.99.5258	15000±200MM
11.99.5259	20000±300MM

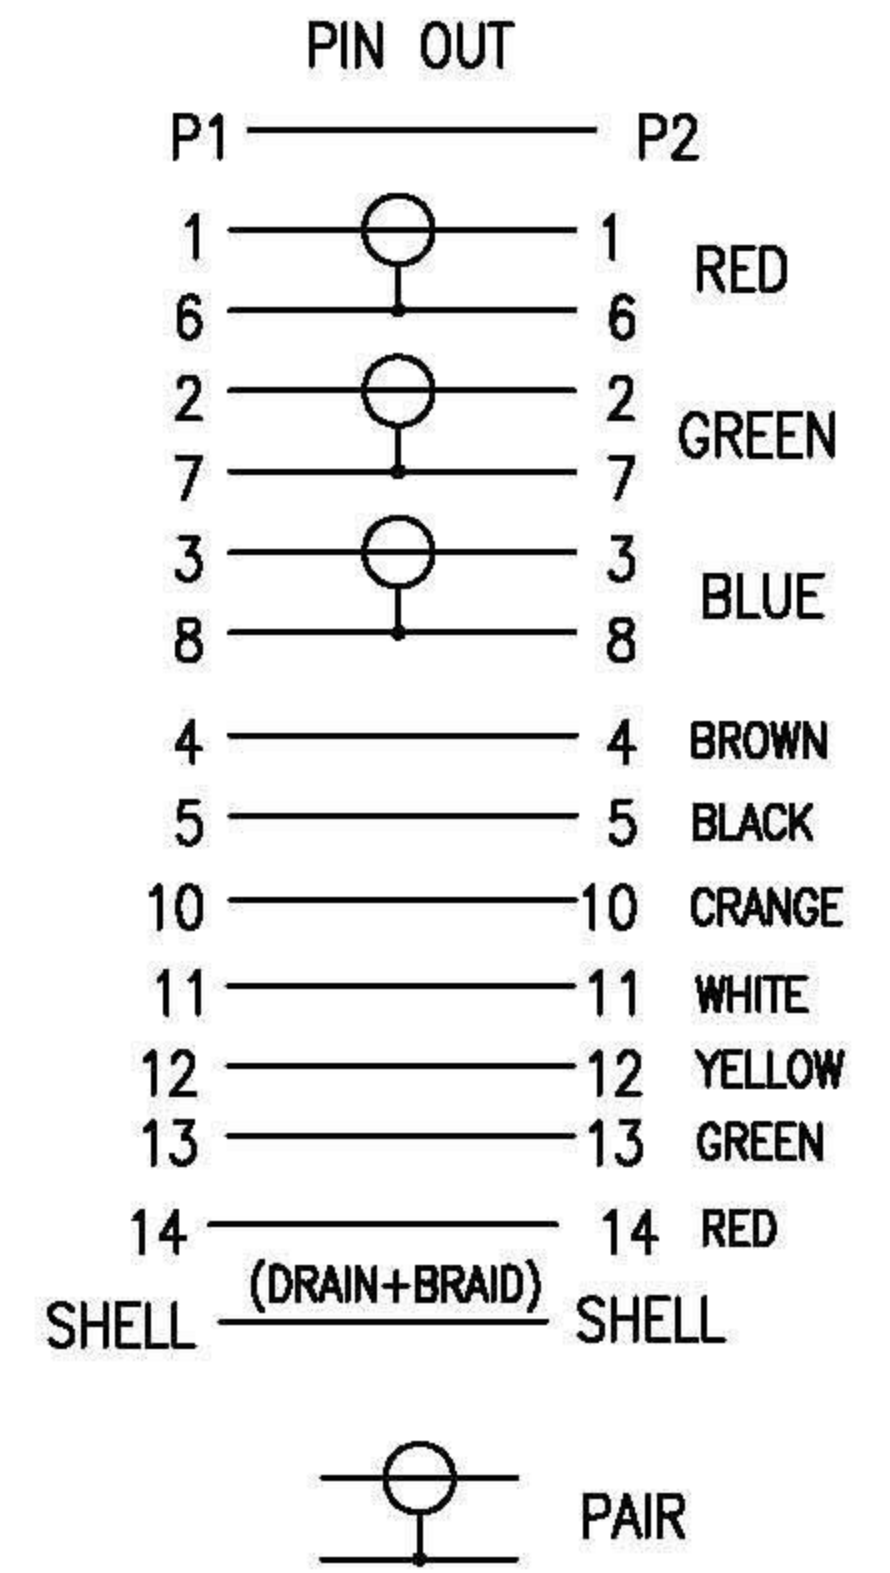

			DIMENSIONAL TOLERANCES:	SIZE: FREE	Rotronic Co., Ltd.		ENG.: Penny
02	ADD THREE NEW MODEL	2011-10-11	X. ±	UNIT: mm			VALUE SVGA Cable, HD15 M-HD15 M, black
01	change the pin assignment	2011-9-21	.X ±	REV.: 02	DRAWING NO.: 0282	APPROVED:	
00	NEW ISSUE	2011-9-19	X* ±3*	PAGE: 1/1			
REV.	MODIFY DESCRIPTION	DATE	.X* ±1*				