
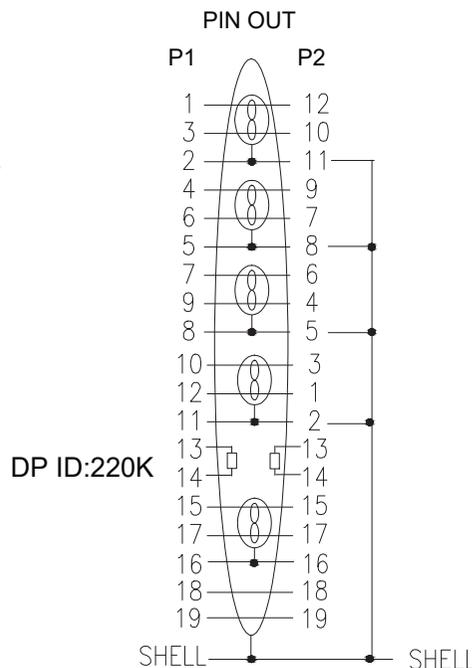
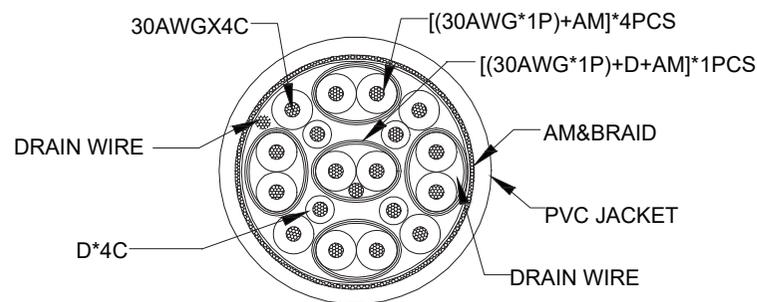


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2024/06/17	

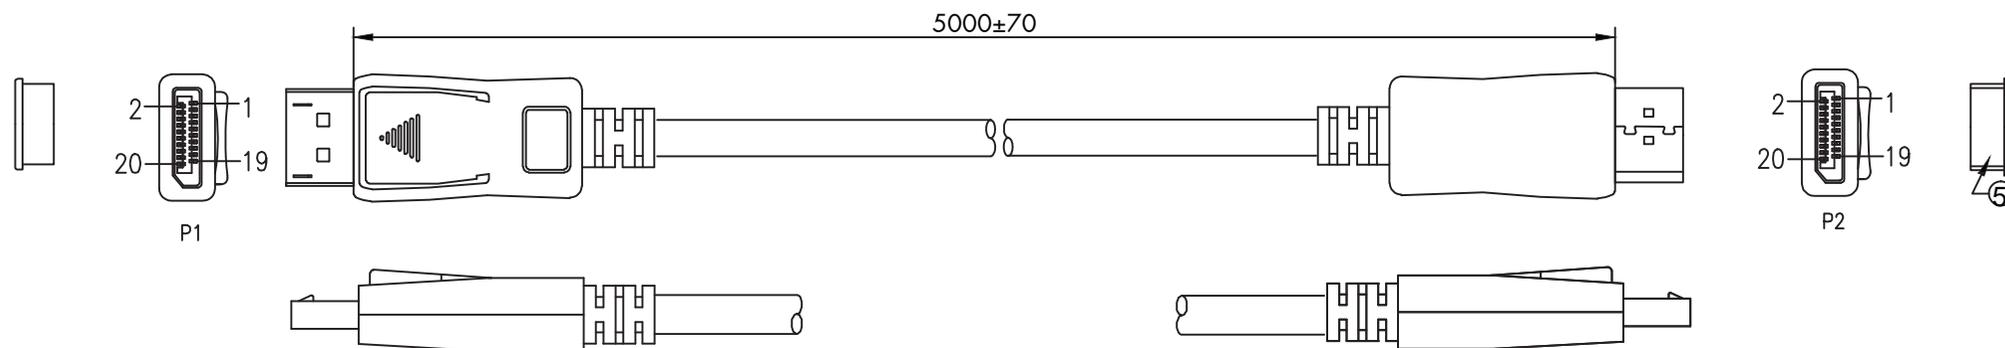

NOTE:
 1. Tested by quantum data M42d test
 Instrument for DP2.1(54G) 13.5Gbps/lane UBR13.5
 2. Tested by PC:7680*2160@240HZ 4:4:4 10bit
 3840*2160@120Hz 4:4:4 12bit
 3840*2160@60Hz 4:4:4 12bit
 3. Printing: High Speed Cable 20276 80 C 30V VW-1
 RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

⑤	DUST COVER	TRANSPARENT PE	2	
④	BOOT	PVC, BLACK	2	
③	OUTER MOLD	ABS ,BLACK	2	
②	DP MALE	DP2.1 MALE, WITH LOCK, BLACK INSULATION, GOLD PLATED PIN AND SHELL	2	
①	CABLE	(30AWG/1 2C+AM+M)*4+(30AWG/1 BC*1P+D+AM+M)+4D+30AWG/1*4C+D+AM+ BRAID AL-MG, JACKET: PVC/BLACK , OD7.0±0.2MM	1	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

NAME DisplayPort Cable v2.1, 16K, DP80 54G, DP-DP, M/M,5m
 Item no. 11.99.6028

SECOMP

MAPE	TOLERANCE
	X. ±1.00
	X.X ±0.50
DRAW BY	SCALE MM
	PAGE 1/1