
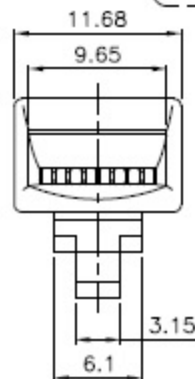
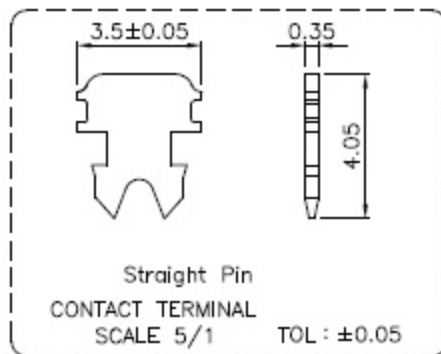

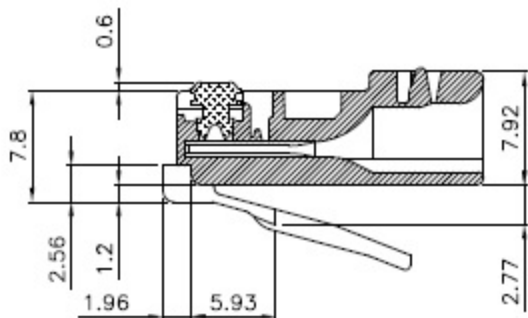
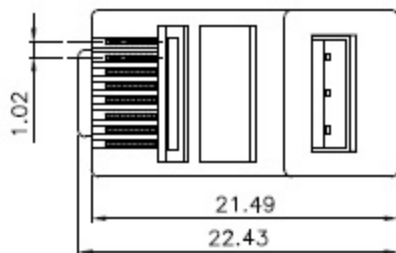


SCALE 2/1



Specification :

Material:

1. Housing: Polycarbonate, UL94-V2, clear color.
2. Contacts: Phosphor bronze, min. 50 micro-inch gold plating on surface contact area.

Performance :

- a. Operating temperature: -10°C to 60°C
- b. Tensile strength: Cable to plug, 7.7kgs
- c. Conductors AWG: 24AWG stranded

GENERAL TOLERANCE OF DIMENSIONS ±0.1	DRAWING	05.MAY.2020	SP	<b>SECOMP</b>				
	CHECK	05.MAY.2020	CMD					
	APPROVAL	05.MAY.2020	YTY					
		DATE	NAME	ITEM NO.: 12.01.1087				
	SCALE 2/1 (A4)	UNIT mm	DES.: ROUNE Modular-Plug unshield,round,10pcs/set					
	DRAWING NO. 12.01.1087(SA1)		<table border="1"> <tr> <td>DRAWING CLASSIFICATION</td> <td>S</td> <td>SHEET</td> <td>1 OF 1</td> </tr> </table>		DRAWING CLASSIFICATION	S	SHEET	1 OF 1
DRAWING CLASSIFICATION	S	SHEET			1 OF 1			
	DRAWING CLASSIFICATION							

1

2

0

3

4

10cm

5

6