
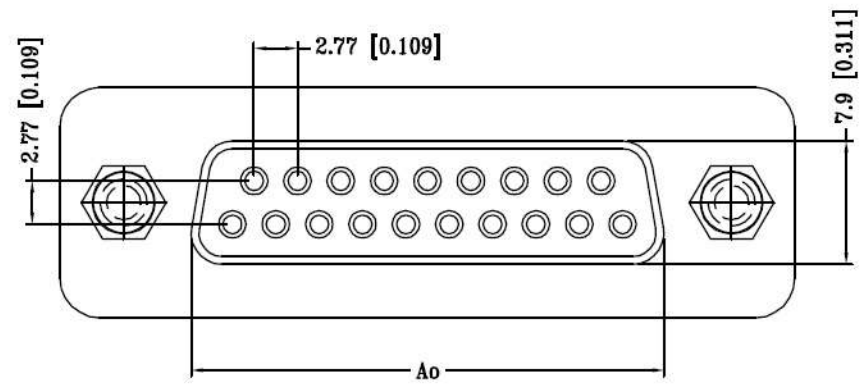
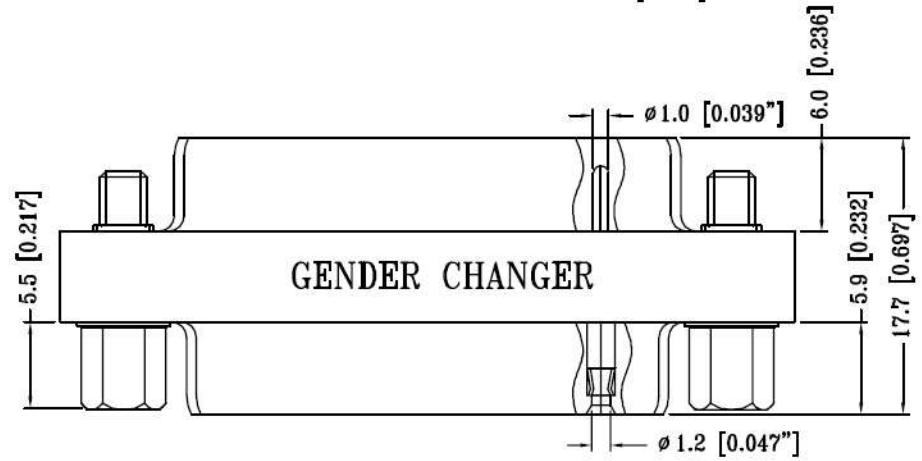


REV.	ECN NO. / DESCRIPTION	DATE

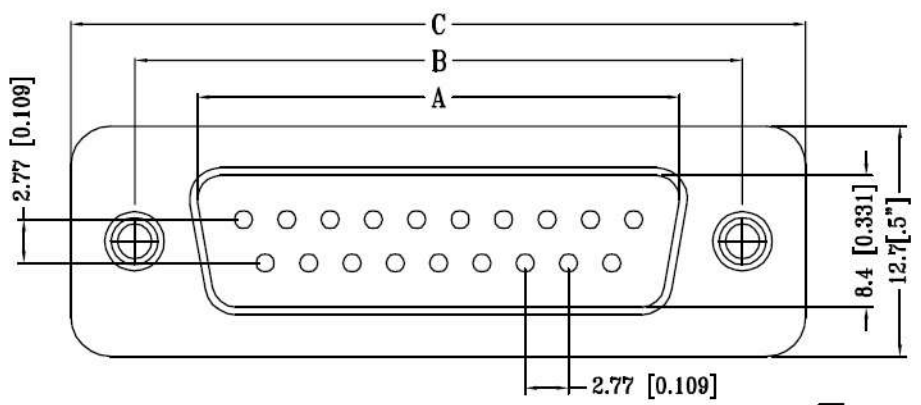

MATERIAL

INSULATOR: BLUE PBT UL94 V-0 RATED
 CONTACTS: BRASS
 SHELL: STEEL

FINISH

CONTACTS: GOLD FLASH OVER NICKEL
 SHELL: NICKEL PLATED

ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE: 25m Ω MAX
 CURRENT RATING: 5 AMPERES
 INSULATION RESISTANCE: 5000M Ω MIN
 DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC 60SEC

PART NO.	Circuits	A	B	C
12.03.2010	25	38.3(1.507")	47.0(1.85")	53.3(2.098")

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	SECOMP			
.X \pm 0.30	X $^{\circ}$ \pm 3 $^{\circ}$	12.03.2010	TITLE ROLINE Mini Gender Changer, 25-pin F-F			
.XX \pm 0.15	X $^{\circ}$ \pm 1.5 $^{\circ}$	APPROVE Ted Ju 07/02 '04				
.XXX \pm	XX $^{\circ}$ \pm	CHECK Ted Ju 07/02 '04	DWG NO. LAP-A2615CB2L			
CUSTOMER DRAWING		DRAW C.C.S 07/02 '04		SHEET	SCALE	REV
SIZE A4	UNITS MM[INCH]			1 / 1	1:1	1