
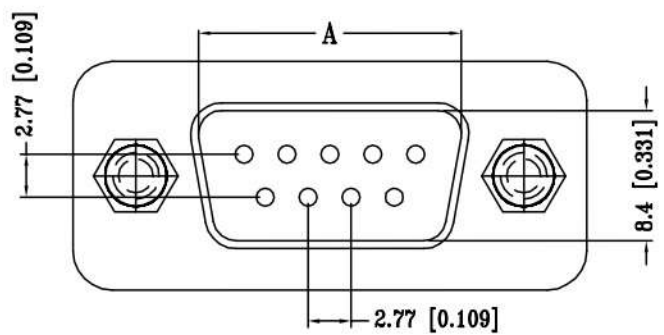
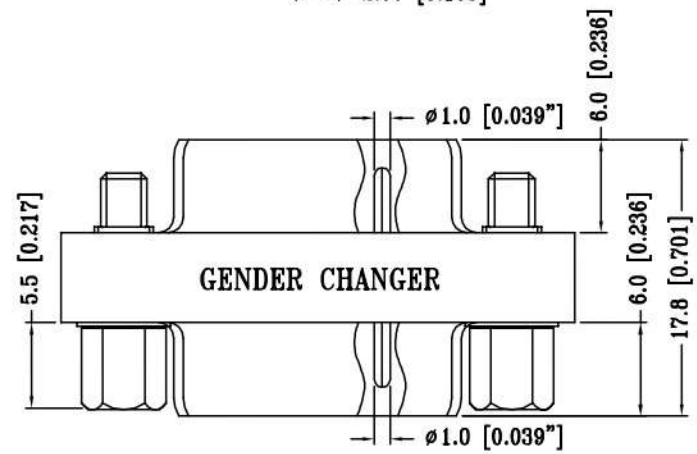


REV.	ECN NO. / DESCRIPTION	DATE

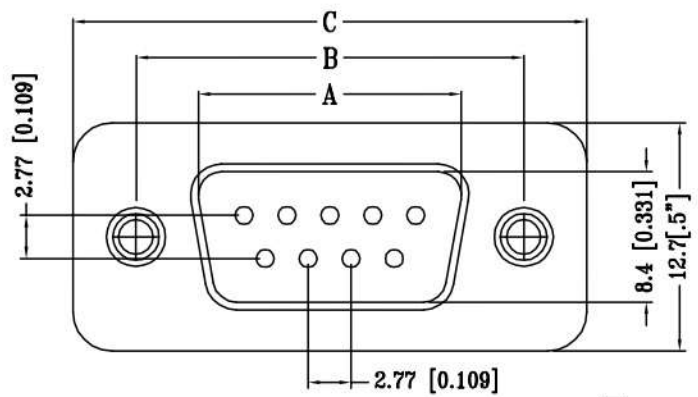

MATERIAL

INSULATOR: BLUE PBT UL94 V-0 RATED
 CONTACTS: BRASS
 SHELL: STEEL

FINISH

CONTACTS: GOLD FLASH OVER NICKEL
 SHELL: NICKEL PLATED

ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE: 25mΩ MAX
 CURRENT RATING: 5 AMPERES
 INSULATION RESISTANCE: 5000MΩ MIN
 DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC 60SEC

PART NO.	Circuits	A	B	C
12.03.2025	9	16.9(.665")	25.0(.984")	31.2(1.22")

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. 12.03.2025	SECOMP		
.X ±0.30	X.° ±3°	APPROVE Ted Ju 07/02 '04			
.XX ±0.15	X.° ±1.5°	CHECK Ted Ju 07/02 '04	DWG NO. LAP-A1215CB2L		
.XXX ±	XX.° ±	CUSTOMER DRAWING	DRAW C.C.S 07/02 '04		
SIZE A4	UNITS MM[INCH]	DRAWING SYMBOL	SHEET 1 / 1	SCALE 1:1	REV 1