
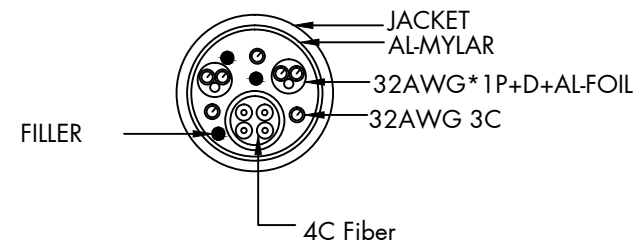


CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0	INITIAL RELEASE	2022.04.19	
A1	ADD "HDMI" LOGO ON THE PLUGS UPDATE CABLE LABEL	2023.02.20	

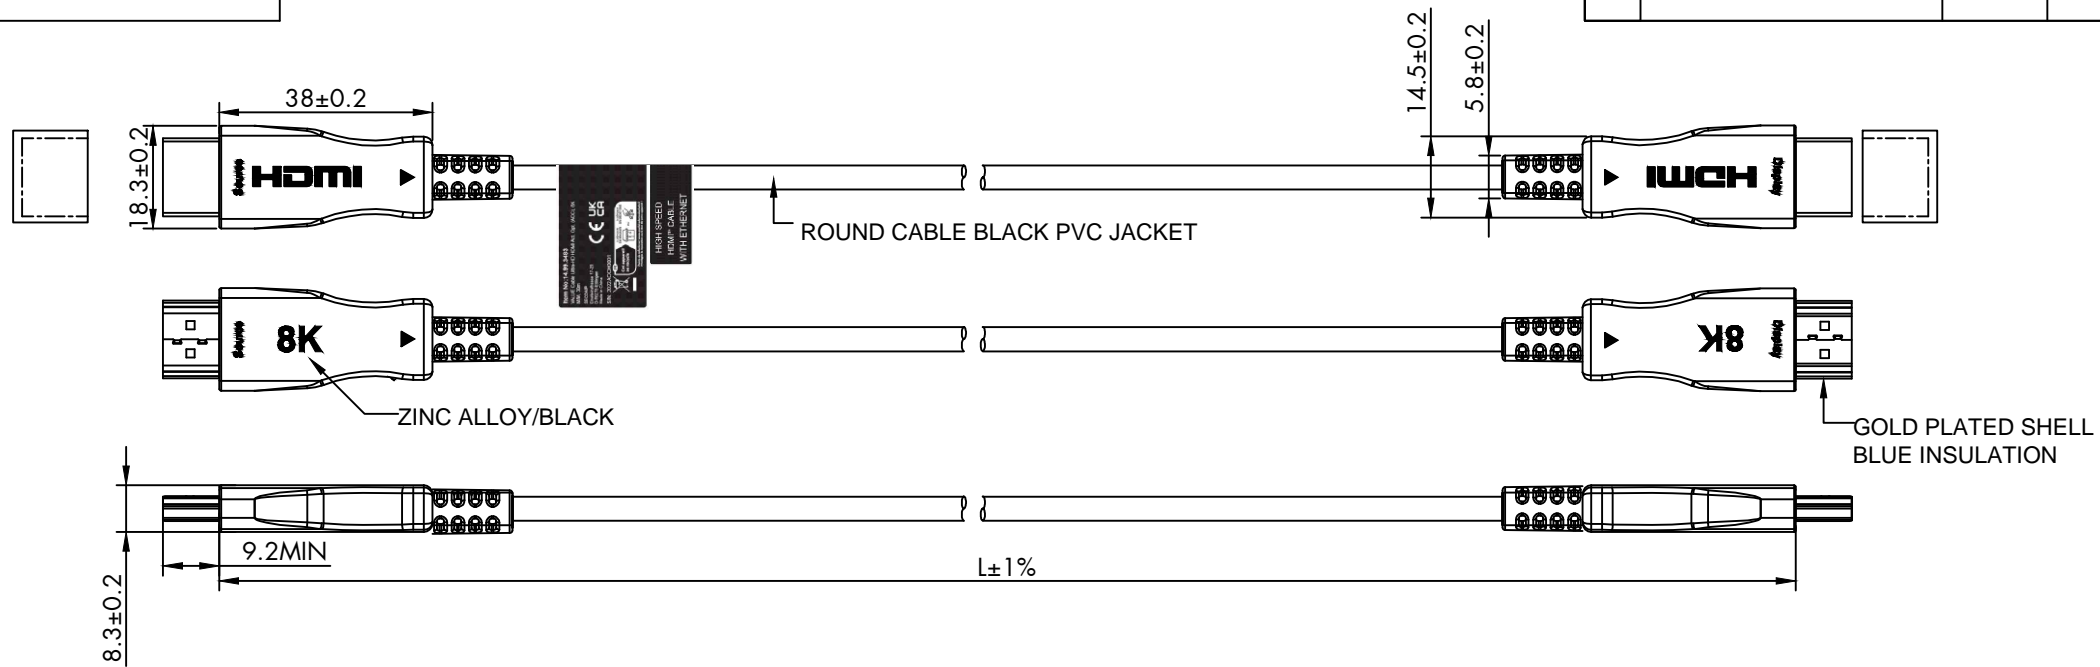

- NOTE:**
- Support 48G 4K@120HZ 4:4:4 or 8K@60HZ DSC
 - Plug and play
 - Support HDCP1.4/2.2, ARC,HDR10, 3D,HEC
 - ARC can achieve up to 100M
 - Self-detecting function for EDID information
 - No loss of signal
 - Hybrid optical cable with fiber and copper wire
 - Pin gold plated, shell gold plated
 - Environmental specifications: for indoor use only
 - Operating temperature: -40 to 70 °C, Storage Temperature -20~40 °C
 - Minimum bending radius 20mm
 - Max. tension force: 100N
 - Powered via HDMI devices
 - {4Core OM3 multimode fiber(high speed data)+ 7core copper cable[(32AWG TC*1P+D+AL)+32AWG TC*1P+D+AL)+32AWG TC*1C+32AWG TC*1C+32AWG TC*1C]+F+AL+Jacket}, Jacket: PVC/Black, OD: 5.2±0.2mm
 - ZINC Alloy Housing , black color .

ITEM NO	LENGTH	PACKING	
14.99.3484	15m±150mm	1pc+opp bag/brown box+label	
14.99.3485	20m±200mm	1pc+opp bag/brown box+label	
14.99.3483	30m±300mm	1pc+spool/brown box+label	
14.99.3487	50m±500mm	1pc+spool/brown box+label	
NAME VALUE Ultra-HD HDMI Active Optical Cable, 8K,m/m			
SECOMP		MAPE	TOLERANCE
			X. ±1.00 X.X ±0.50
		DRAW BY	SCALE MM
			PAGE 1/1