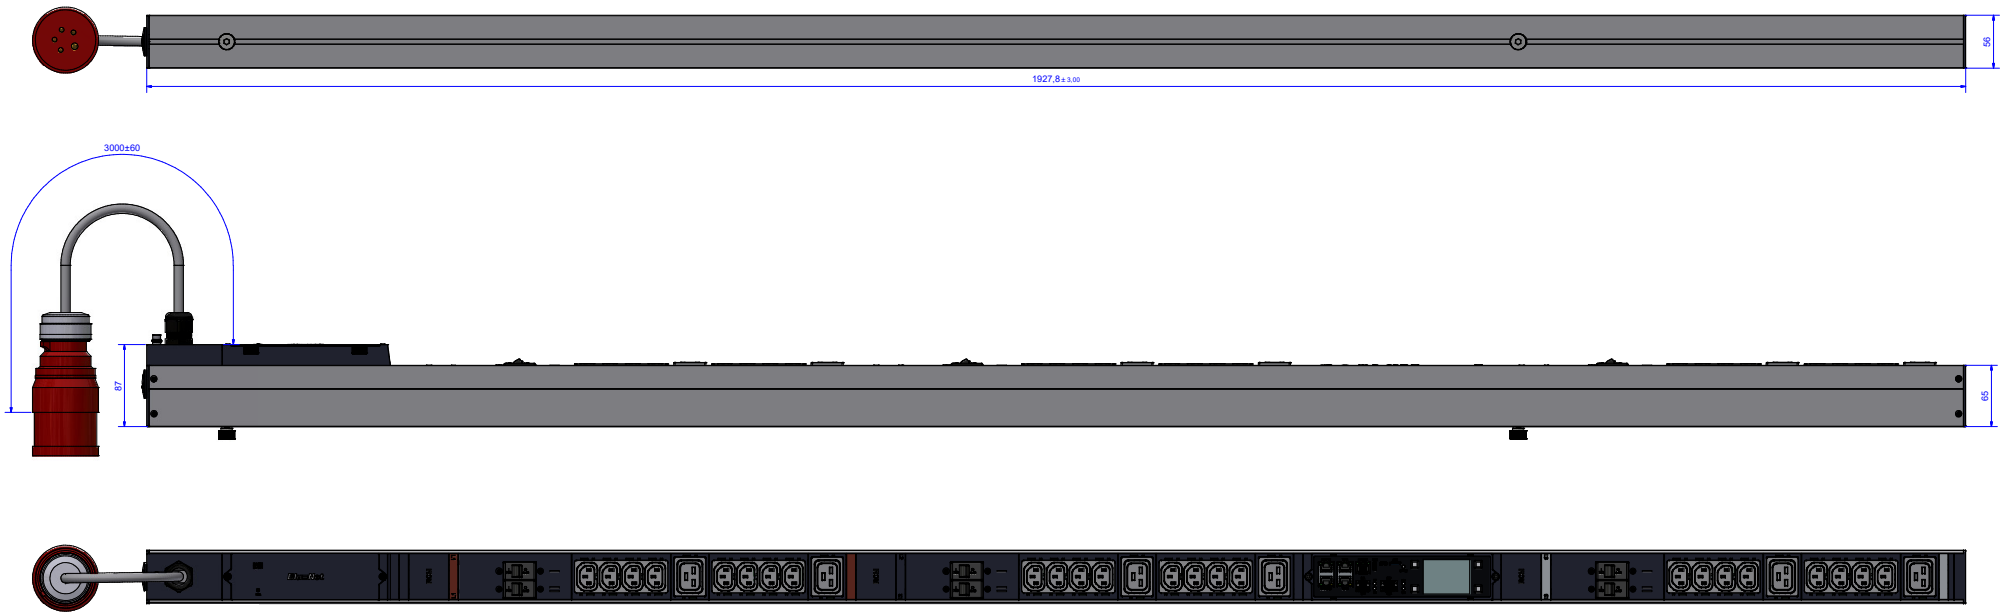

BN PRO Metered RCM Messung pro Phase Differenzstrommessung je Phase, Typ B Eingang: 32 A / 400 V | 22 kW, Zuleitung: 3,0 m | 4 mm², mit CEE Stecker 32 A rot Ausgang: 24x C13 Kaltgerätedosen, 6x C19 Kaltgerätedosen, 6x hydraulisch-magnetische LS-Schalter 16 A, Integrierte Funktion zur Messung von Strom, Spannung, Blind-, Schein-, Wirkleistung, Blind-, Schein-, Wirkenergie, Frequenz und Leistungsfaktor Im Betrieb tauschbarer Controller und tauschbares Netzteil Integrierter Webserver mit Webinterface 1x Gbit/s (PoE) und 1x 10/100Mbit/s Ethernetanschluss Schnittstelle für PDU-Verbund (bis zu 20 PDUs) 1x RJ45 Schnittstelle für bis zu zehn externe Sensoren 1x USB-C Anschluss (USB 2.0) 2.4” TFT-Farbdisplay Rahmen zur farblichen Kennzeichnung (blau, rot) Inkl. Haltewinkel (L-Form, einfach) verpackt im Karton	BN PRO Metered RCM Measurement per phase Residual Current Monitoring per phase, Typ B Input: 32 A / 400 V | 22 kW, Supply cable: 3,0 m | 4 mm², with CEE plug 32 A red Output: 24x C13 IEC Socket, 6x C19 IEC Socket, 6x hydraulic-magnetic circuit breakers 16 A, Integrated function for measuring current, voltage, reactive, apparent and active power, Reactive, apparent and active energy, frequency and power factor Hot-swappable controller and power supply unit Integrated web server with web interface 1x Gbit/s (PoE) and 1x 10/100Mbit/s Ethernet connection Interface for PDU network (up to 20 PDUs) 1x RJ45 interface for up to ten external sensors 1x USB-C port (USB 2.0) 2.4"" TFT color display Incl. frames for color coding (blue, red) Incl. mounting brackets (L-shaped, for one PDU) Packed in cardboard box

Datum / Date	Änderungen / Changes	Gezeichnet / Drawn	Datum / Date	Name	Name
			11.07.2024	SC	