




Datenblatt - Fiche technique - Data sheet

**21.15.0518**

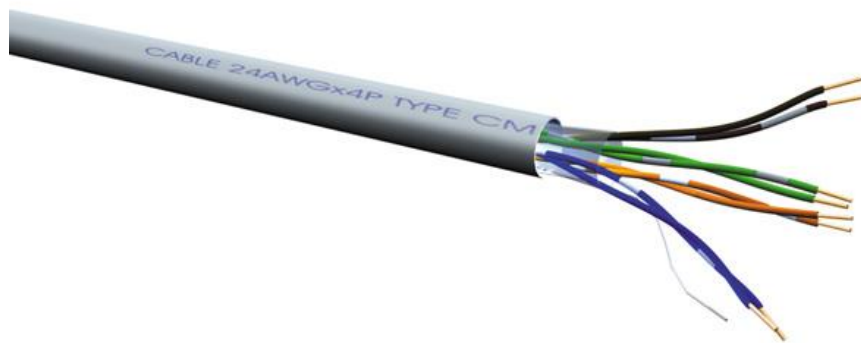

ROLINE UTP Kabel Kat. 5e, Litze, 100m

ROLINE Câble UTP Cat. 5e, fils tressés, 100m

ROLINE UTP Cable Cat.5e, Stranded Wire, 100 m

## STANDARD COMPLIANCES

All Category 5e Requirements as Per ANSI/TIA, ISO/IEC, and CENELEC EN Standards  
ANSI/TIA-568-C.2 Cat.5e

ISO/IEC 2<sup>nd</sup> Edition 11801 Class D

CENELEC EN 50173-1

IEC 61156-6, CENELEC EN 50288-3-2 for patch cable

Flame Retardancy is Verified According to IEC 60332-1-2

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC

## CONSTRUCTION & CHARACTERISTICS

Conductor	Material / Size	Bare Copper / 24AWG
Insulation	Material	HDPE
	Thickness	Nominal: 0.186 mm
	Diameter	Nominal: 0.96 mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min. 300%
Unaged Tensile Strength	Min. 1.683 Kg/mm <sup>2</sup>	
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal: 0.5 mm
	Diameter	Nominal: 5.4 mm
	Color	Grey
	Unaged Elongation	Min. 100%
	Unaged Tensile Strength	Min. 1.407 Kg/mm <sup>2</sup>
	Aging at 100 °C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	roline UTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 24AWGX4P TYPE CMX(UL) c(UL) CMH E164469-XX XXXXXXXXM	

**rotronic**

ITEM 21.15.0518

ROLINE Cat. 5e UTP Cable, Stranded, 100m

SCALE CHECKER

UNIT APPROVAL

DATE

DATE

DATE

## APPLICATIONS

1000BASE-T Gigabit Ethernet  
 10BASE-T, 100BASE-TX Fast Ethernet (IEEE 802.3)  
 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM  
 550MHz Broadband Video  
 Voice, T1, ISDN

## ELECTRICAL PERFORMANCES


Dielectric Strength of Insulation	2850 V dc / 2 seconds			
Insulation Resistance Test	Min. 5000 MΩ·Km			
Conductor Resistance	Max. 9.38 Ω/100m at 20°C			
Resistance Unbalance	Max. 2%			
Capacitance Unbalance	Max. 160 pF/100m			
Mutual Capacitance	Max. 5600 pF/100m			
Impedance	772kHz	102Ω ± 15%		
	1~125MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency (MHz)	Max.Attenuation (dB/100 meters)	NEXT (dB), Min.	PSNEXT (dB), Min.
	1 MHz	2.0*	65.3*	62.3*
	4 MHz	4.1*	56.3*	53.3*
	8 MHz	5.8*	51.8*	48.8*
	10 MHz	6.5*	50.3*	47.3*
	16 MHz	8.2*	47.2*	44.2*
	20 MHz	9.3*	45.8*	42.8*
	25 MHz	10.4*	44.3*	41.3*
	31.25 MHz	11.7*	42.9*	39.9*
	62.5 MHz	17.0*	38.4*	35.4*
	100 MHz	22.0*	35.3*	32.3*
	125 MHz	24.9*	33.8*	30.8*

The asterisked (\*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula:

$$NEXT(f \text{ MHz}) \geq NEXT(0.772) - 15 \log_{10}(f \text{ MHz} / 0.772) \text{ dB}$$

## CONFIGURATION:

orange	2	green	3
white/orange		white/green	
blue	1	brown	4
white/blue		white/brown	

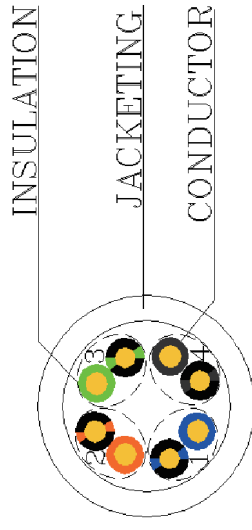

**rotronic**

ITEM 21.15.0518

ROLINE Cat. 5e UTP Cable, Stranded, 100m

DATE

SCALE

DATE

UNIT

DATE

CHECKER

APPROVAL