



Datenblatt - Fiche technique - Data sheet



**21.15.2654**



ROLINE Patchkabel Kat.6 S/FTP (PiMF), Comp. Level, LSOH, schwarz, 1,5 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, noir, 1,5 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, black, 1.5 m

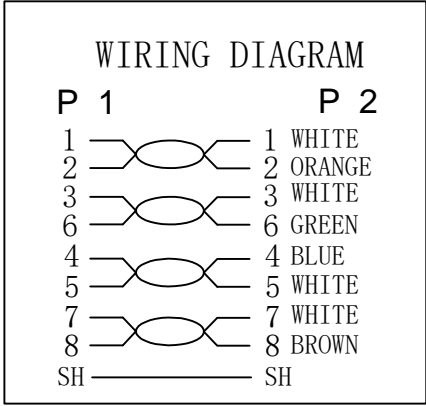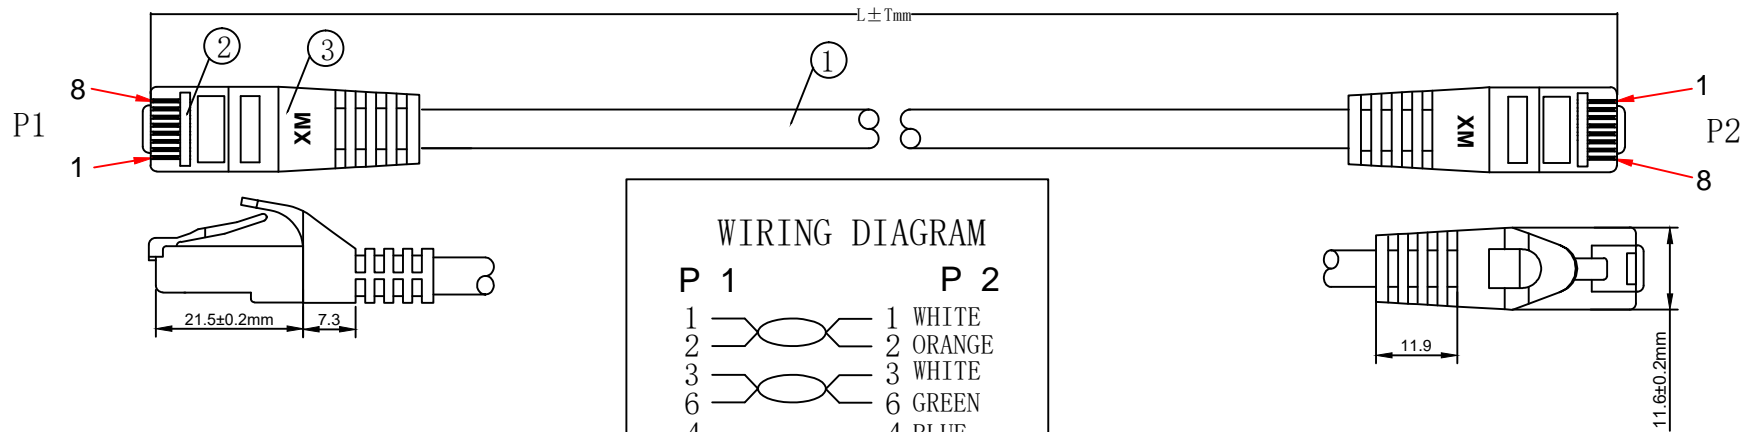

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC black	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:black (PANTONE:black 3C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2956	300mm	±10mm
21. 15. 2650	500mm	±15mm
21. 15. 2651	1000mm	±30mm
21. 15. 2654	1500mm	±45mm
21. 15. 2652	2000mm	±60mm
21. 15. 2653	3000mm	±90mm
21. 15. 2655	5000mm	±150mm
21. 15. 2656	7500mm	±210mm
21. 15. 2657	10000mm	±300mm
21. 15. 2658	15000mm	±450mm
21. 15. 2659	20000mm	±600mm

ITEM NO.	21. 15. 2956	21. 15. 2650	21. 15. 2651	21. 15. 2652	21. 15. 2653
21. 15. 2654	21. 15. 2655	21. 15. 2656	21. 15. 2657	21. 15. 2658	21. 15. 2659
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level1, black				

**SECOMP**

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

2016-10-20 A