
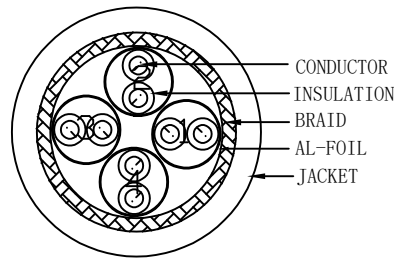


WIRING DIAGRAM

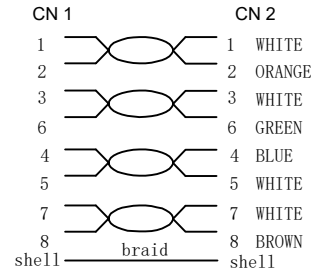

- NOTE:
- 1.ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
 - 2.FLUKE Channel LINK TEST:
TEST LIMIT:ISO11801 Channel Class EA
 - 3.Storage temperature:-10°C~+60°C
Working temperature:-20°C~+75°C
 - 4.RoHS2.0 AND REACH compliant
 - 5.Spray WORD:CAT6A S/FTP 4x2x28AWG/7 LSZH ISO11801 &EN50173 & ANSI/TIA 568.2-D
 - 6.Support PoE per IEEE 802.3af,PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt
 - 7.Minimum of the bending radius is 6*ODmm(Suitable for all meters)

MATERIAL LIST:

③	OVER MOLD	75A PVC White(RAL9003)	2	
②	PLUG	RJ45 8P8C SHIELDED Plug PIN GOLD PLATED 3U",THE SHELL PLATED NICKEL, COLOUR:TRANSPARENT BLUE	2	
①	CABLE	S/FTP CAT. 6A 28AWG (BC+AL-FOIL)*4P+BRAID (AL-MG) JACKET:White (RAL 9003) LSZH OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

21. 15. 4368	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 0.3m	300±10
21. 15. 4360	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 0.5m	500±15
21. 15. 4361	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 1m	1000±20
21. 15. 4364	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 1.5m	1500±30
21. 15. 4362	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 2m	2000±30
21. 15. 4363	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 3m	3000±50
21. 15. 4365	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 5m	5000±100
21. 15. 4366	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 7m	7000±200
21. 15. 4367	ROLINE PatchCord S/FTP (PiMF) Cat.6A Slim, DATACENTER, LSOH, tangle free, 10m	10000±200
ITEM NO.	DESC.	LENGTH



		NEW	2024-06-25	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.