



PIN OUT

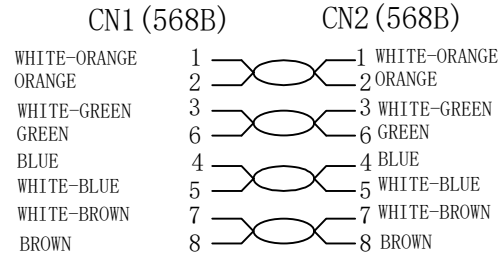

NOTE:

1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
2. FLUKE Channel TEST:
TEST LIMIT:ISO11801 Channel Class Ea
3. Working temperature:-10°C~+60°C
Storage temperature:-20°C~+75°C
4. RoHS2.0 AND REACH compliant
5. Spray WORD:CAT6A U/UTP 4x2x32AWG/7 Ultraflex LSZH-TPE ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 15mm(Suitable for all meters)



MATERIAL LIST

③	OVER MOLD	75A PVC GREEN(PANTONE3278C)	2	
②	CONNECTOR	RJ45 8P8C UNSHIELDED PLUG, PIN GOLD PLATED 3U", COLOUR:TRANSPARENT	2	
①	CABLE	CAT.6A U/UTP CABLE (32AWG BC*1P)*4P JACKET:ULTRAFLEX LSZH-TPE GREEN(PANTONE3278C) OD:3.4±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2022-07-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

Item NO.	Length (mm)
21. 44. 3930	150±10
21. 44. 3931	300±10
21. 44. 3932	500±20
21. 44. 3933	1000±20
21. 44. 3934	1500±30
21. 44. 3935	2000±30
21. 44. 3936	3000±50
21. 44. 3937	5000±100

DESC. ROLINE GREEN Cat.6A U/UTP Patch cord 10G Slim Type Ultraflex LSZH-TPE, green

SECOMP