



WIRING DIAGRAM



SHELL — BRAID — SHELL

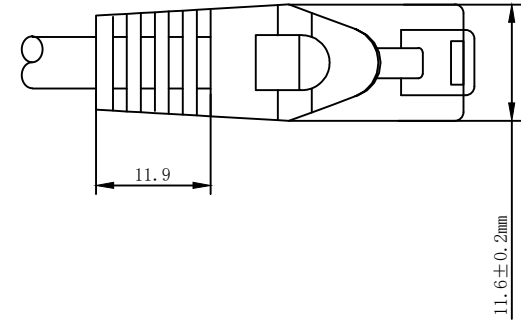

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke channel test: (L ≤ 60m)  
TEST LIMIT: ISO 11801 Channel Class EA
3. SPRAY WORD: CAT. 6A S/FTP TPE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568.2-D
4. RoHS2.0 and REACH COMPLIANT

MATERIAL LIST

|   |           |  |   |  |
|---|-----------|--|---|--|
| ③ | OVER MOLD | 75A PVC  | 2 |  |
| ② | CONNECTOR | RJ45 8P8C shielded Plug, Pin Gold Plated 3u", Transparent BLUE                           | 2 |  |
| ① | CABLE     | S/FTP CAT. 6A (1/26AWGBC*1P+AL-FOIL)*4PAIRS+ JACKET: Flame retardant TPE OD: 6.2 ± 0.2mm | 1 |  |

|                 |               |
|-----------------|---------------|
| Color: Black 3C |               |
| ITEM NO.        | LENGTH        |
| 21.99.0720      | 20000 ± 300mm |
| 21.99.0721      | 30000 ± 400mm |
| 21.99.0722      | 50000 ± 400mm |

| NO. | PARTS NAME | SPECIFICATION STANDARD       | QT' Y    | REMARK |
|-----|------------|------------------------------|----------|--------|
|     |            |                              |          |        |
|     |            | NEW                          | 2023-2-1 | A      |
| BY  | CHK        | REVISION RECORD MODIFICATION | DATE     | REV.   |

DESC. VALUE Outdoor S/FTP PatchCord Cat.6A/Class EA, Solid

