


German Outlet

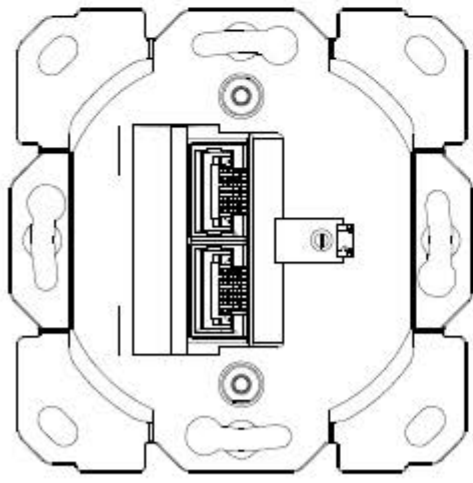

NOTE:

ELECTRICAL:

- 1. VOLTAGE RATING : 125V AC RMS
- 2. CURRENT RATING : 1.5A mp
- 3. CONTACT RESISTANCE : 100 MILLI OHMS MAX
- 4. INSULATION RESISTANCE : 1000M OHMS MIN @ 500V DC
- 5. DIELECTRIC STRENGTH : 750V AC RMS 60Hz, 1MIN
- CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1
IEC 11801 PL CLASS EA

VOKA-LAN 5 LAN 1000 AWG 23/1 CAT.7 Shielded (length:15M 50M 90M)

Accessory:

- 1. Instruction Sheet 1pcs
 - 2. RoHS 2.0&REACH Compliant
 - 3. Designable
- Suitable for central plate of the Germany Company Busch
Jaeger and Jung

ENVIRONMENTAL:

- 1. STORAGE : -40° TO+85°
 - 2. OPERATION : 0° TO+70°
- RJ45 JACK COMPLY TO REQUIREMENTS OF IEC-60603-7-51
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL

- 1. COVER&SHUTTER: FLAME RETARDANT ABS
- 2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35MM SP8C 3u"Gold Plated
- 3. IDC CONTACT : PHOSPHOR BRONZE T=0.50MM WITH NICKEL PLATING
- 4. MOUNTING BRACKET: ZINC ALLOY#3
- 5. TOP COVER : ZINC ALLOY#3
- 6. RJ45 JACK LIFE: 750 TIMES MIN
- 7. IDN LIFE : 200 TIMES MIN
- 8. WIRE : AWG 22-24 Cable Conductor OD:0.65MM-0.5MM
- 9. IDC BODY :Krone Type Fireproof PC/ABS UL-94V0/
With Colour Coded Printing T568A/B
- 10. RETENTIVENESS OF INSERTION STRUCTURE: 50N 60±5s
- 11. Can be wired up in 4x90° steps(up and down, left and right).

DESC.	ROLINE Cat. 6A Wall Outlet, STP (shielded), dual port, ClassEA, white
-------	---

Item no	Color
25. 16. 8490	White (RAL9003)

SECOMP

		NEW	2018. 02. 09	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.