


unit: mm

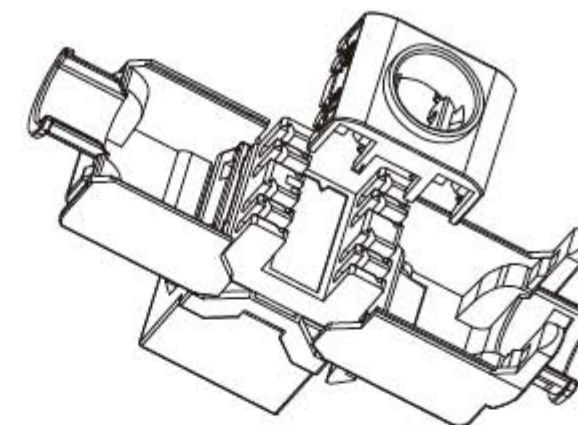

NOTES:

ELECTRICAL:

1. Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat. 6A to ISO/IEC 11801 Ed. 2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568-C.2 (2009-08)
IEC 60603-7-51 Ed.1 (12/2008)
5. Compliance with Class EA up to 500 MHz to ISO/IEC 11801 Ed. 2.2:2011-06
DIN EN 50173-1:2011-09

ENVIRONMENTAL:

1. Operation temperature: -10°C - +60°C
2. Storage temperature : -40°C - +70°C

MECHANICAL

1. SHIELD MATERIAL: ZINC ALLOY Silver
 2. IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE, TIN PLATING
 3. RJ45 Contact Life: 750 Times Min
 4. Plug inforce: <30N
 5. Solid cable: 1/22AWG(0.65MM)-1/26AWG(0.40MM) ID:1.05MM-1.5MM
 6. Cable OD: 5.0mm-8.0mm
 7. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
 8. 360° Shield connection
- RoHS 2.0 and REACH Compliant

MATERIAL LIST:

⑦	MODULAR COVER	FIREPROOF PC	1	
⑥	RJ 45 JACK INSERT	PHOSPHOR BRONZE 8P8C GOLD PLATED	8	
⑤	PCB	1.2mm UL 94V0 EM-293	1	
④	IDC BODY	FIREPROOF/PC	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG(0.40mm-0.65mm) CABLE	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

unit	mm			
		NEW	2019-06-17	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	26.99.0375
DESC.	VALUE Slim Keystone Cat6A STP, toolless

SECOMP