


# GP Batteries

## Product Specification

Model no.: CH35

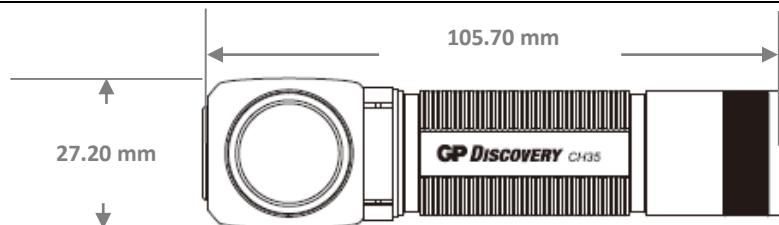

### Basic information:

|              |  |
|--------------|--|
| Product Name | : Multiuse Rechargeable Headlamp                 |
| Dimensions   | : 105.7 x 27.1 x 27.2 mm                         |
| Weight       | : 103 g (without battery) / 153 g (with battery) |

### Per ANSI FL1 Standard:

|                         |   |
|-------------------------|---|
| Lumen output (+/- 15%)  | : 600 lm / 300 lm / 60 lm / 15 lm                                     |
| Beam distance (+/- 15%) | : 130 m / 80 m / 30 m / 15 m  |
| Runtime (+/- 15%)       | : 600: Instant 40 sec, 300 lm:8 hours, 60 lm:17 hours, 15 lm:60 hours |
| IP rating               | : IPX4  |
| Impact resistance       | : 1 m   |

### Technical parameters:

|                      |  |
|----------------------|--|
| LED chip             | : Patented LED   |
| Color temperature    | : 5700 – 7000K   |
| Housing material     | : Aluminum with standard anodizing (Black)   |
| Battery type         | : 1 x Li-ion 18650 battery   |
| Switch               | : Electronic switch (On lamp head)   |
| Light mode           | : Full press: Flood light (300 lm) / Flood light (60 lm) / Flood light (15 lm) / Off<br>When light on / Off, Double click -> strobe<br>When light on / Off, long press -> Flood light (600 lm) |
| Accessories Included | : Micro USB Cable (50 cm)<br>GP Li-ion 18650 2600 mAh  |
| Certification        | : CE, ROHS   |

 Member  
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.